



# Houtdraaiwerken-penkits

## Lucky Fountain Pen Kit Assembly Instructions


### Required Accessories

- 7mm pen mandrel
- Bushing BU308
- DB121 and 9.6mm Drill Bit



### Preparing the Blank

- Cut 2 blank to the length of the tube and add 1/16" for squaring off.
- Drill a 12.1mm and a 9.6mm hole lengthwise through the blank.
- Spread glue over the tube, insert the blank with a twisting motion to spread the glue evenly inside.
- Center the tube lengthwise inside the blank.
- When the glue is dry, square the ends of the blank. Use a barrel trimmer, or a universal pen blank squaring jig with a power disc sander. Take the excess material down flush with the ends of the brass tube. (do not trim beyond the length of the tube since this may interfere with operation of the mechanism and assembly). Use a barrel trimmer to clean the inside of the tube.

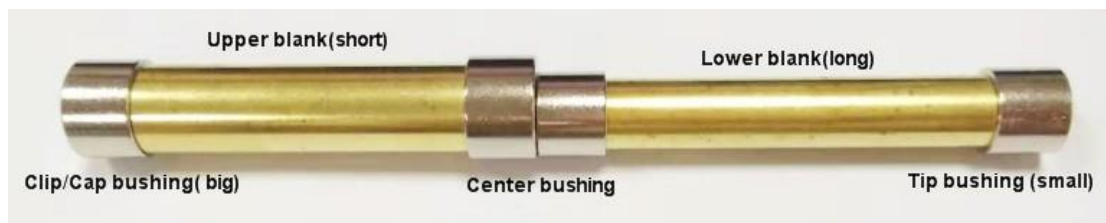

### Turning the Blank

- Mount the bushings and blank according the diagram above.
- Thread on the knurled nut and hand tighten to hold all components in place.
- Slide the tailstock up snugly against the mandrel shaft inserting the live center point into the mandrel dimple, lock in place.
- Hand tighten the quill adjustment to firm up the mandrel. (DO NOT overtighten, it could damage the mandrel.
- Using sharp tools, turn the blank down close to the bushing diameter. Turn the barrel

(straight or to a profile of your choice)

- Sand the blank down to be flush with the bushings gradually increasing the sandpaper grits.
- Finish the barrel with your choice of polish. Allow sufficient time for the polish to cure.

### Diagram A



### Assembly

- Arrange parts according to Diagram A.
- Press the Clip assembly to one end of the Upper tube (shorter).
- Press the Center band coupler, black end first, into the opposite end of the Upper tube(shorter).
- Press the Cap coupler into the end of the Lower tube(long).
- Press the Nib coupler into the opposite end of the Lower tube(long).
- Thread the Cap into the Cap coupler.
- Attach the Ink cartridge/Ink converter to the back of the fountain nib, then thread the fountain Nib into the Nib coupler.