



Houtdraaiwerken-penkits

Stick Shift Pen Kits Assembly Instructions


Required Accessories:

- 7mm pen mandrel
- Bushing BU217
- 3/8" Drill Bit DB3/8
- Penmill PM013



Preparing the Blanks:


- Cut one pen blank to the length of brass tube (add 1/16" for trimming).
- Drill a 3/8" hole lengthwise through the blank.
- Spread the glue over the tube. Insert the tube into the blank with a twisting motion to spread the glue evenly inside. Center the tube lengthwise in the blank.
- When the glue dries, Square the end of each blank. Use a Barrel trimmer with 3/8" shaft or a universal pen blank squaring jig with a power disc sander. Take the wood down to the brass tube. Do not trim beyond the length of the tube since this may interfere with operation of the mechanism and assembly. Use the barrel trimmer shaft to clean the inside of the tube.

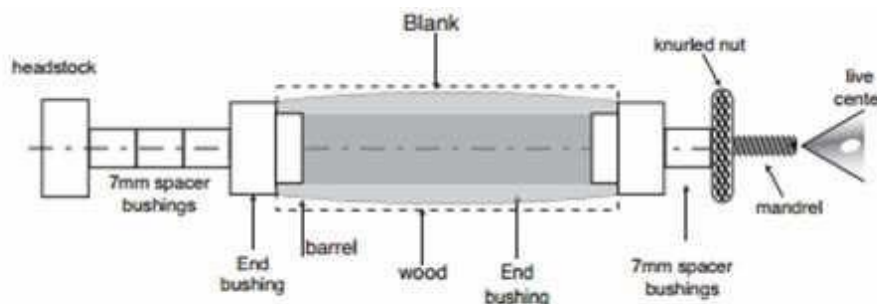

Turning the Blanks:

- Mount the bushings and blanks on the mandrel .

- Thread on the knurled nut and hand tighten to hold all components in place.
- Slide the tailstock up snugly against the mandrel shaft inserting the live center point into the mandrel dimple, lock in place.
- Hand tighten the quill adjustment to firm up the mandrel. (DO NOT overtighten, it could damage the mandrel.
- Using sharp tools, turn the blank down close to the bushing diameter. Turn the barrel (straight or to a profile of your choice)
- Sand the blank down to be flush with the bushings gradually increasing the sandpaper grits.
- Finish the barrel with your choice of polish. Allow sufficient time for the polish to cure. - refer to polish instructions.

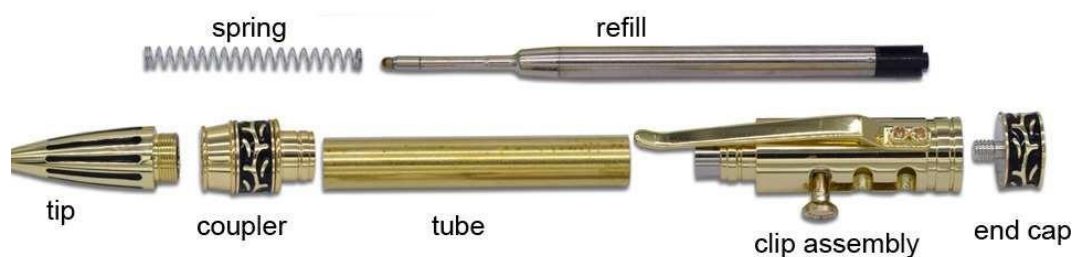

Pen Assembly

NOTE: Layout Finished parts according to Diagram above • Press the coupler, extension end first into either end of the barrel.

- Press the clip assembly into the opposite end of the barrel.
- Insert the refill into the opening at the coupler, follow with the spring.
- Screw the tip over the refill.
- Screw the cap over the top of the pen.
- Lock or unlock the gear shift to extend or retract the refill tip.